
Tesla slashed Model S and X staff in recent layoffs A Spot of Grime on the North Dakota Music Scene Harden ignites The Garden for career-high 61 points Shocking moment man attacks family in fit of rage Trump Makes Rare Cave on State of the Union Speech Coca-Cola Nixes Super Bowl Ad After 11-Year Run Sanders: President isn't hung up on the wall Ronda Rousey gets animated in 'Mortal Kombat 11' Why JFK Went To Hell Pizzagate: Woods denied pizza during Torrey pro-am

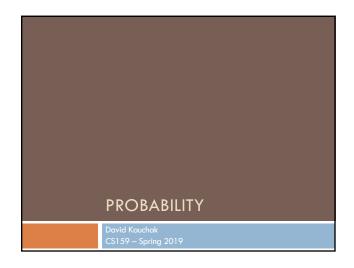

### Admin

Assignment advice

- □ test individual components of your regex first, then put them all together
- write test cases

Assignment deadlines posted

Class participation

# Why probability?

Prostitutes Appeal to Pope

Language is ambiguous

Probability theory gives us a tool to model this ambiguity in reasonable ways.

# Basic Probability Theory: terminology

An **experiment** has a set of potential outcomes, e.g., throw a dice, "look at" another sentence

The sample space of an experiment is the set of all possible outcomes, e.g.,  $\{1, 2, 3, 4, 5, 6\}$ 

In NLP our sample spaces tend to be very large

- □ All words, bigrams, 5-grams
- All sentences of length 20 (given a finite vocabulary)
- All sentences
- □ All parse trees over a given sentence

# Basic Probability Theory: terminology

An **event** is a subset of the sample space

#### Dice rolls

- {2}
- {3, 6}
- □ even = {2, 4, 6}
- odd =  $\{1, 3, 5\}$

#### NLP

- a particular word/part of speech occurring in a sentence
- a particular topic discussed (politics, sports)
- sentence with a parasitic gap
- pick your favorite phenomena...

#### **Events**

We're interested in probabilities of events

- **□** p({2})
- p(even)
- p(odd)
- □ p(parasitic gap)
- p(first word in a sentence is "banana")

### Random variables


A random variable is a mapping from the sample space to a number (think events)


It represents all the possible values of something we want to measure in an experiment


For example, random variable,  $\boldsymbol{X}$ , could be the number of heads for a coin tossed three times


space	ннн	HHT	HTH	HTT	THH	THT	TTH	TTT
X	3	2	2	1	2	1	1	0


Really for notational convenience, since the event space can sometimes be irregular  $\,$ 

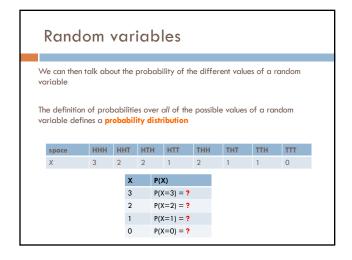


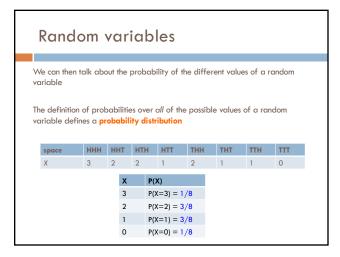


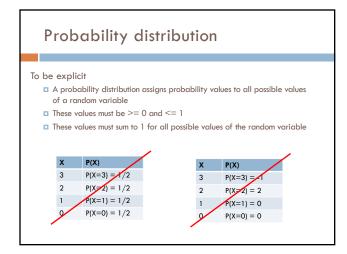


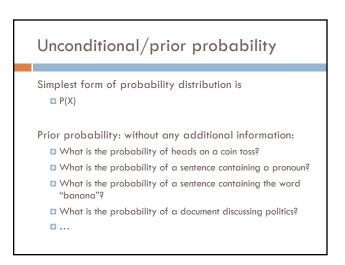

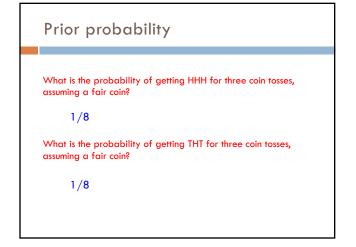

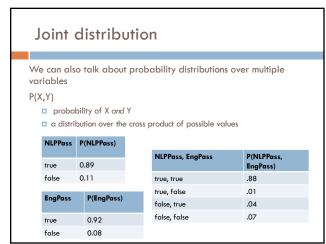

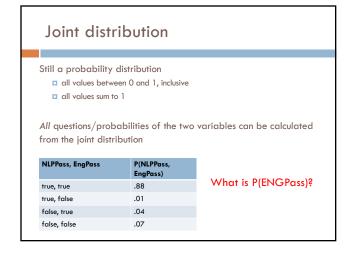

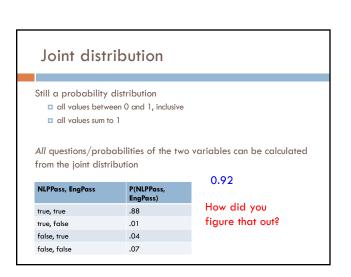



 $P(x) = \sum_{y \in Y} p(x, y)$ 

Called "marginalization", aka summing over a variable

NLPPass, EngPass	P(NLPPass, EngPass)
true, true	.88
true, false	.01
false, true	.04
false, false	.07

# Conditional probability

As we learn more information, we can update our probability distribution


P(X | Y) models this (read "probability of X given Y")

- What is the probability of heads given that both sides of the coin are heads?
- What is the probability the document is about politics, **given** that it contains the word "Clinton"?
- What is the probability of the word "banana" given that the sentence also contains the word "split"?

Notice that it is still a distribution over the values of X

# Conditional probability

$$p(X \mid Y) = ?$$




In terms of pior and joint distributions, what is the conditional probability distribution?


# Conditional probability


 $p(X \mid Y) = \frac{P(X,Y)}{P(Y)}$ 




Given that y has happened, in what proportion of those events does x also happen

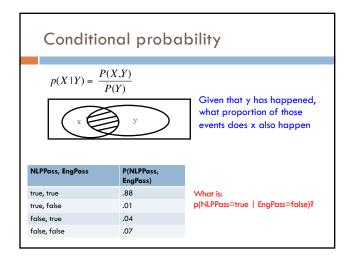

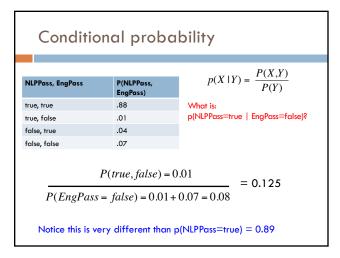


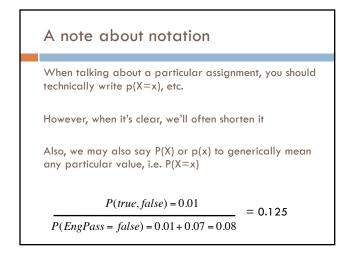

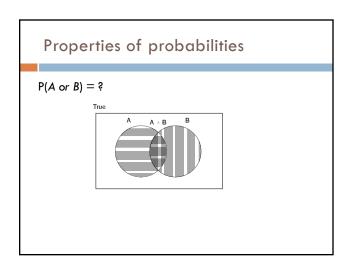

# Properties of probabilities

$$P(A \text{ or } B) = P(A) + P(B) - P(A,B)$$



# Properties of probabilities

$$P(\neg E) = 1 - P(E)$$

More generally:

□ Given events  $E = e_1, e_2, ..., e_n$ 

$$p(e_i) = 1 - \sum_{j=1:n, j \neq i} p(e_j)$$

 $P(E1, E2) \leq P(E1)$ 

# Chain rule (aka product rule)

$$p(X \mid Y) = \frac{P(X,Y)}{P(Y)} \qquad \boxed{\qquad} p(X,Y) = P(X \mid Y)P(Y)$$

We can view calculating the probability of X AND Y occurring as two steps:

- 1. Y occurs with some probability P(Y)
- 2. Then, X occurs, given that Y has occured

or you can just trust the math... ©

### Chain rule

 $p(X,Y,Z) = P(X \mid Y,Z)P(Y,Z)$ 

 $p(X,Y,Z) = P(X,Y \mid Z)P(Z)$ 

 $p(X,Y,Z) = P(X \mid Y,Z)P(Y \mid Z)P(Z)$ 

 $p(X,Y,Z) = P(Y,Z \mid X)P(X)$ 

$$p(X_1, X_2, ..., X_n) = ?$$

# Applications of the chain rule

We saw that we could calculate the individual prior probabilities using the joint distribution

$$p(x) = \sum_{y \in Y} p(x, y)$$

What if we don't have the joint distribution, but do have conditional probability information:

- P(Y)
- P(X | Y)

$$p(x) = \sum_{y \in Y} p(y) p(x \mid y)$$

## Bayes' rule (theorem)

$$p(X \mid Y) = \frac{P(X,Y)}{P(Y)} \qquad \qquad p(X,Y) = P(X \mid Y)P(Y)$$

$$p(Y \mid X) = \frac{P(X,Y)}{P(X)} \qquad \qquad p(X,Y) = P(Y \mid X)P(X)$$

$$p(X \mid Y) = \frac{P(Y \mid X)P(X)}{P(Y)}$$

## Bayes rule

Allows us to talk about P(Y | X) rather than P(X | Y)

Sometimes this can be more intuitive

Why?

$$p(X \mid Y) = \frac{P(Y \mid X)P(X)}{P(Y)}$$


## Bayes rule


p(disease | symptoms)


How would you estimate this?


Find a bunch of people with those symptoms and see how many have the disease


Is this feasible?

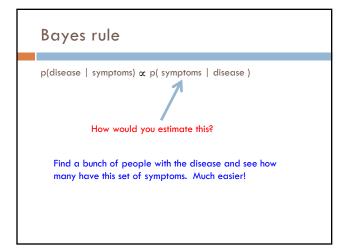


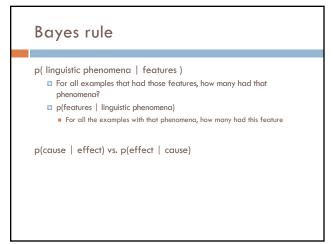

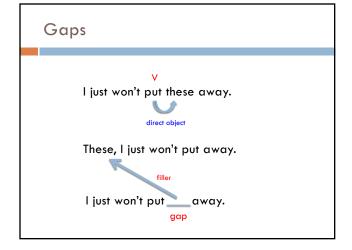

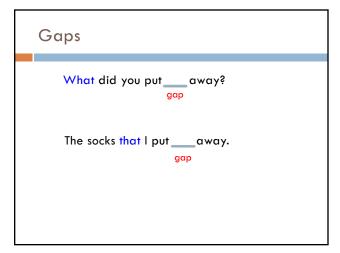

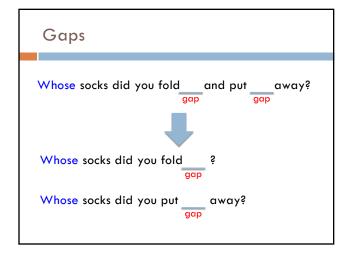

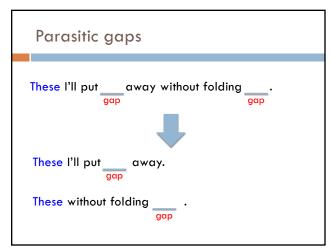

Parasitic gaps

These I'll put \_\_\_\_ away without folding \_\_\_ . \_\_ gap

1. Cannot exist by themselves (parasitic)

These I'll put my pants away without folding \_\_\_ . \_\_ gap

2. They're optional

These I'll put \_\_\_\_ away without folding them. \_\_\_ gap

Parasitic gaps

http://literalminded.wordpress.com/2009/02/10/do
ugs-parasitic-gap/

## Frequency of parasitic gaps

Parasitic gaps occur on average in 1/100,000 sentences

#### Problem:

Laura Linguist has developed a complicated set of regular expressions to try and identify parasitic gaps. If a sentence has a parasitic gap, it correctly identifies it 95% of the time. If it doesn't, it will incorrectly say it does with probability 0.005. Suppose we run it on a sentence and the algorithm says it has a parasitic gap, what is the probability it actually is?

### Prob of parasitic gaps

Laura Linguist has developed a complicated set of regular expressions to try and identify parasitic gaps. If a sentence has a parasitic gap, it correctly identifies it 95% of the time. If it doesn't, it will incorrectly say it does with probability 0.005. Suppose we run it on a sentence and the algorithm says it has a parasitic gap, what is the probability it actually does?

G = gapT = test positive

What question do we want to ask?

# Prob of parasitic gaps

Laura Linguist has developed a complicated set of regular expressions to try and identify parasitic gaps. If a sentence has a parasitic gap, it correctly identifies it 95% of the time. If it doesn't, it will incorrectly say it does with probability 0.005. Suppose we run it on a sentence and the algorithm says it has a parasitic gap, what is the probability it actually does?

G = gapT = test positive

 $p(g \mid t) = ?$ 

### Prob of parasitic gaps

Laura Linguist has developed a complicated set of regular expressions to try and identify parasitic gaps. If a sentence has a parasitic gap, it correctly identifies it 95% of the time. If it doesn't, it will incorrectly say it does with probability 0.005. Suppose we run it on a sentence and the algorithm says it has a parasitic gap, what is the probability it actually does?

G = gapT = test positive

$$p(g \mid t) = \frac{p(t \mid g)p(g)}{p(t)}$$

$$= \frac{p(t \mid g)p(g)}{\sum p(g)p(t \mid g)} = \frac{p(t \mid g)p(g)}{p(g)p(t \mid g) + p(\overline{g})p(t \mid \overline{g})}$$

# Prob of parasitic gaps

Laura Linguist has developed a complicated set of regular expressions to try and identify parasitic gaps. If a sentence has a parasitic gap, it correctly identifies it 95% of the time. If it doesn't, it will incorrectly say it does with probability 0.005. Suppose we run it on a sentence and the algorithm says it has a parasitic gap, what is the probability it actually does?

$$p(g \mid t) = \frac{p(t \mid g)p(g)}{p(g)p(t \mid g) + p(\overline{g})p(t \mid \overline{g})}$$

$$= \frac{0.95 * 0.00001}{0.00001 * 0.95 + 0.99999 * 0.005} \approx 0.002$$